


AMF

DOUGH CONVEYORS



90° Vertical Conveyor

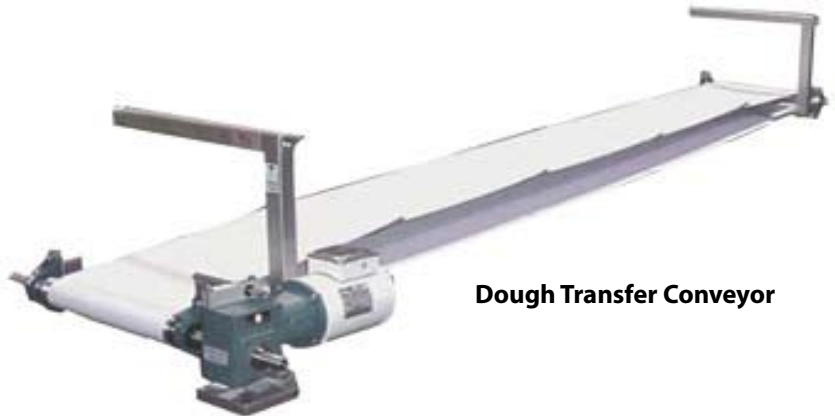

Dough Transfer Conveyor

- **Sanitary Construction for all Dough Applications**
- **Eliminates Pipe Damage to Dough**
- **Available in Belt Widths From 8" (203 mm) to 60" (1524 mm)
24" (610 mm) is Standard**
- **Kneeling and Floor Time Conveyors Also Available**

FEATURES & BENEFITS

Durable and Reliable

- Constructed with a heavy-duty tubular stainless steel frame and a reliable direct drive motor, AMF conveyors are designed to provide years of trouble-free operation.
- FDA approved poly-stick belts prevent dough sticking and work in tandem with a concave belt system that keeps the dough centered on the conveyor.

The AMF Conveyor Family

- AMF's custom-designed conveyors are created to suit specific production and layout requirements, matching lengths and belt width to your needs.
- Horizontal transfer is accomplished with three of AMF's conveyors
 - Dough transfer conveyor moves dough in one direction
 - Bi-directional conveyor permits flow direction to be manually changed

- Reversing conveyor transfers dough horizontally and the flow direction changes automatically through the use of level control eyes and PLC. Cut-off knives are provided at each end to prevent dough from being pulled from the hopper.
- Vertical conveyors transfer dough vertically from a pump discharge to the horizontal transfer height and are available in inclined and 90° configurations

Sanitary, Low Maintenance Design

- Cantilevered design for easy belt removal
- Hinged sandwich conveyor for easy cleaning and maintenance on the vertical conveyor
- UHMW belt scraper assembly
- Dual belt tracker assemblies
- Variety of dough pump connectors

MECHANICAL FEATURES

- Heavy-duty stainless steel frames for durability and corrosion resistance
- Heavy-duty pillow block bearings
- 1 HP washdown motor
- Heavy-duty gear reducer, ratio matched to specifications
- Belt scraper system
- Dual belt take-up
- Belt tracker assembly
- Poly, non-stick belting
- Stainless steel hanger brackets
- 24" (610 mm) belt width - 16" (406 mm) on vertical conveyor



Direct Drive Design



Poly Belt Scraper



ELECTRICAL FEATURES

- Motor starter (shipped loose unless control panel is ordered)
- Controls can be combined with pump, mixer or make-up system

OPTIONS

- AC inverter speed control package
- Level control device with mounting bracket
- Zero clearance roller in lieu of standard
- Painted NEMA 12 enclosure with disconnect for up to 4 conveyors
- Stainless steel NEMA 12 enclosure with disconnect for up to 4 conveyors
- Stainless steel floor support legs
- Larger drive motors for longer lengths and wider belts
- Wider belt widths up to 60" (1524 mm) wide
- Kneeling point
- Additional machine manuals
- Recommended spare part kits

SPECIFICATIONS

Conveyor Type	Belt Width*	Motor Type
90° Vertical	16" (406 mm)	(2) 1 HP
80° Vertical	24" (610 mm)	(2) 1 HP
Transfer & Bi-Directional	24" (610 mm)	1 HP
Reversing	24" (610 mm)	1 HP


* Other belt widths are available as an option

Electrical Requirements:




Approximate main power - 1.5 KVA (double for vertical)

PLC I/O Voltage: 24VDC in/120VAC out




DIMENSIONAL DRAWING

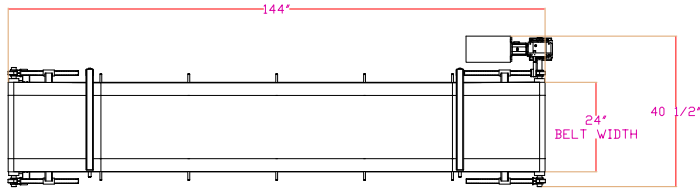


Transfer Conveyor

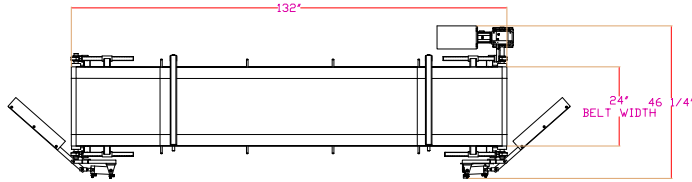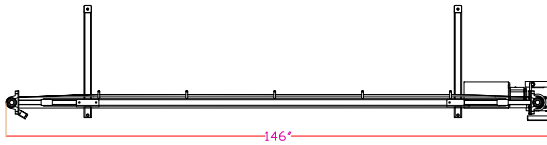

Reversing Conveyor

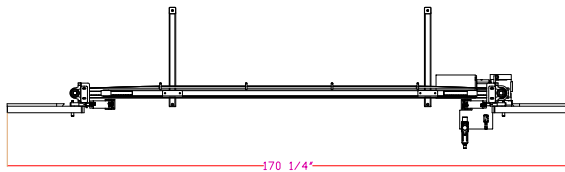

Vertical Conveyor

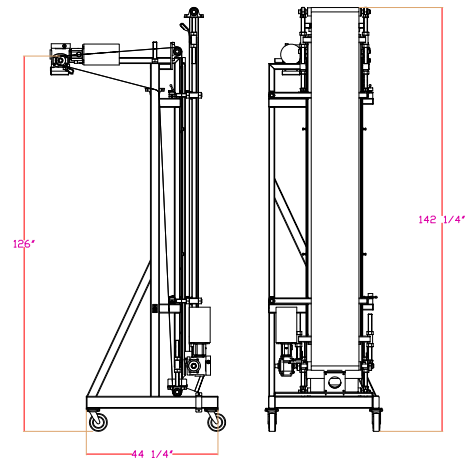

Headquarters:
2115 W. Laburnum Ave.
Richmond, Virginia 23227
Tel: 1-800-225-3771
or 1-804-355-7961
Fax: 1-804-342-9724
sales@amfbakery.com

Europe Office:
West Park Ring Road
Leeds LS16 6QQ
England
Tel: 44-1132-787110
Fax: 44-1132-741415
sales-europe@amfbakery.com

Asia Office:
Room 15-2, A-Building
Thunis Dev. Building
No.11 Hui Xin East St.
Chaoyang District
Beijing, China 100029
Tel: 86-10-64823613
Fax: 86-10-64934259
sales-asia@amfbakery.com

FOR MORE INFORMATION PLEASE CALL YOUR ACCOUNT MANAGER OR

1-800-BAKERS-1
www.amfbakery.com

AMF's focus on continuous improvement may result in changes to machinery specifications without notice.